

LogiLink®

Power Adapter with PIR Motion Detector

Art. No.: PA0153




The energy saving Power Adapter with Motion sensor is perfect for garage, hallway, living room and watering appliances.

Features:

- » Automatically switch ON the power supply when human motion detected
- » 120° detection zone to sense movement up to 9m away
- » Automatically identify day and night with the LUX switch
- » Sensor's Sensitivity adjustable according to the location
- » Time-Delay is added continually: When it receives the second induction signals within the first induction, it will restart to time from the moment
- » Easy setup and energy saving
- » Perfect for dark rooms or hallways and works great with powered animal feeding and watering appliances



Automatically identify
day and night

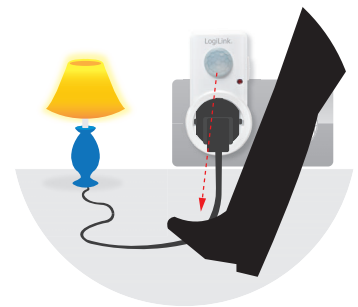

Automatically turn ON when
human motion detected



PA0153



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered namework of their respective owners.

LogiLink®

Power Adapter with PIR Motion Detector

Art. No.: PA0153



Specification:

Power Input	AC 220V~240V 50Hz, 6A max
Rated Load	Max.1200W (Light bulb) Max. 300W (LED)
Ambient Light	3~2000LUX (adjustable)
Detection Range	120°
Detection Distance	2~9m (<24°C) adjustable
Detection Moving Speed	0.6~1.5m/s
Time Delay	Min.10±3 seconds Max. 7±2 minutes
Power Consumption	Approx. 0.5W
Operating Temperature	-20°C~40°C
Operating Humidity	<93%RH



Package Contents:

- » 1 x Power Adapter
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 180 x 110mm
- » Packing Weight: 0.15kg
- » Carton Dimension: 480 x 450 x 250mm
- » Carton Q'ty: 40pcs
- » Carton Weight: 6.3kg

Warning

- *Only to be used indoor.
- *Only to be used after powering on.
- *Only to be used within max load.



PA0153



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademark of their respective owners.