


# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1	B	#C5180235 1 ABEL. EXP FOR P1 P2 P3 P4	04/26/06

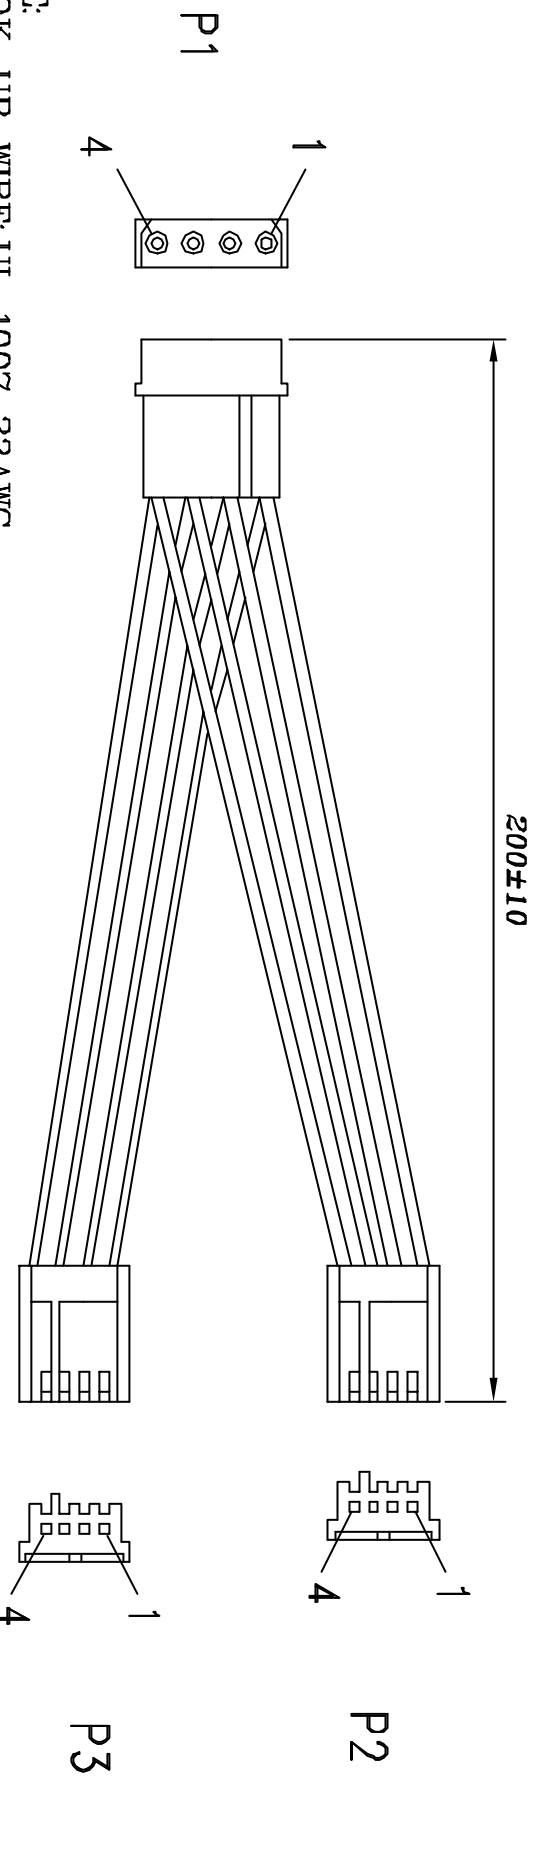

**NOTE:**

1. HOOK-UP WIRE: UL-1007 22AWG

2. TERMINAL:

P1: #C5081TOB-2

P2&P3: #A2544TOB-2

3. HOUSING:

P1: 4 PIN MATE LOCK MALE, #C5081H02-4P

P2&P3: 4 PIN(1\*4) SOCKET FEMALE, #A2544H02-4P

4. ELECTRICAL TEST: 100% OPEN SHORT & MIS WIRE TEST

CONTACT RESISTANCE 3 Ohms MAX

INSULATION RESISTANCE 10M Ohms MIN

5. PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL

△ <2>EACH CARTON / ROHS LABEL(L\*W=35\*22mm)

6. EAN CODE: 4260113560471

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

P2	P1	P3
1 YELLOW	1 YELLOW	1
2 BLACK	2 BLACK	2
3 BLACK	3 BLACK	3
4 RED	4 RED	4

**2DIRECT GMBH**

Title POWER SUPPLY CABLE 5.25"  
PLUG + 3.5" SOCKET \* 2

Drawn	Customer P/N	CP0002
Checked	App'd	Customer
Engnr	Scale	NONE

Dwg No. 150-0751	REV: B	Sheet 1/2
------------------	--------	-----------