


ROHS - COMPLIANT

LTR	REV.	DESCRIPTION	DATE

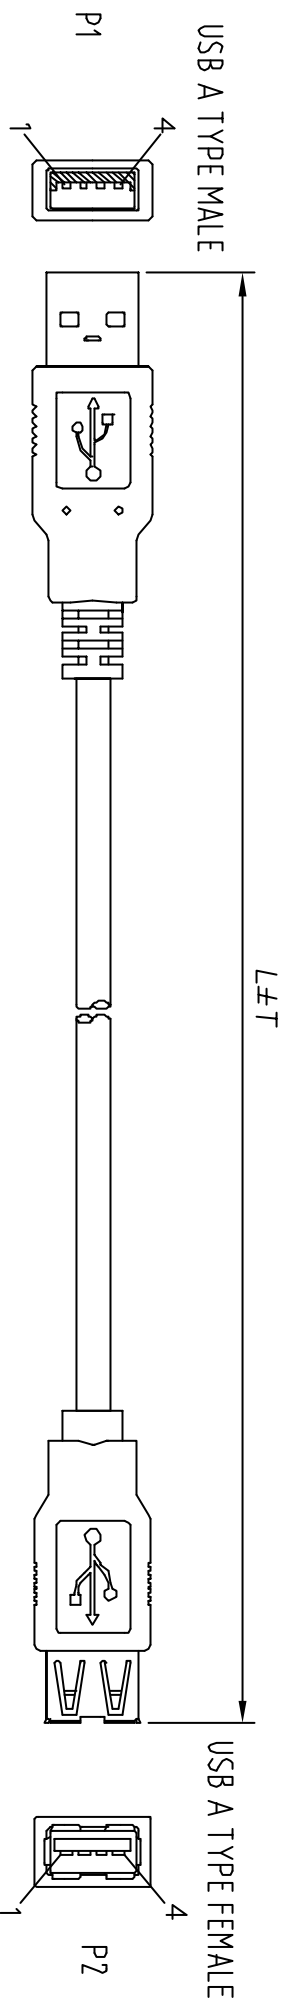

NOTES:

- CABLE:** UL-2725 30AWG(7/0.102 B.C)*2C INS:SR-PVC ID: 0.8±0.05 +30AWG(7/0.102 B.C)*2C INS: SR-PVC ID: 0.6±0.05+AL-FOIL/MYLAR +DRAIN WIRE 32AWG(1/0.203 B.C)+BRAID(8/2/0.1 T.C) PVC JACKET OD: 4.0±0.15mm COLOR: BEIGE(NK-A03) REV 2.0
- CONNECTER:**
 - P1: USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - P2: USB A TYPE FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
- HOOD:** MOLDED TYPE, PVC 45P, COLOR: BEIGE(NK-A03)
- ELECTRICLE TEST:**
 - <1>100% OPEN SHORT & MIS WIRE TEST.
 - <2>CONTACT RESISTANCE 3 Ohms MAX.
 - <3>INSULATION RESISTANCE 10M Ohms MIN.
- PACKING:**<1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL <2>EACH CARTON / ROHS LABEL(L*W=35*22mm)

Color	P1	P2
RED	1	VCC
WHITE	2	-DATA
GREEN	3	+DATA
BLACK	4	GROUND
SHELL		BRAID SHELL

Part No.	CU	Length	Quantity	EAN Code
170-2689-3	CU0012	5000±50mm	4260113560358	
170-2689-2	CU0011	3000±30mm	4260113560341	
170-2689-1	CU0010	2000±30mm	4260113560334	
DWG	P/N	L±T	EAN CODE	

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Drawn	FANNTE 04/14/06	
Check	Customer P/Ni	
Engnr	App'd	Customer
	Scale	Units
	Dwg No.	REV

Title	
USB A/M - A/F CABLE REV 2.0	
2DIREKT GMBH	
Third Angle Projection	Sheet 1/2