



## Fiber Optic Visual Fault Locator 10mW For 2.5 + 1.25 ferrules

Art no.: WZ0049

## **Technical Features**

Visual identification and localization of defects in glass fibers

2.5 mm ferrule + 1.25 mm adapter for LC, SC, ST, FC, LSH, DIN


Range up to 10 km, operating time up to 40 hours

Robust aluminum housing, 175x30x30 mm, black

Wavelength and power: 650  $\pm 20$  nm, 10 mW (max 18 mW)

Power supply: 2 AA batteries, not included

## **Technical Drawings**

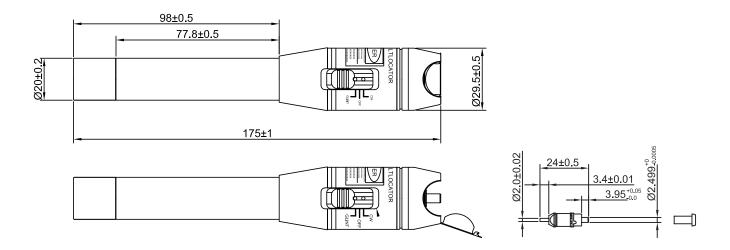













## Package Contents

Fiber Optic Visual Fault Locator 10mW x1

Carrying Bag x1

User Manual x1

Packaging Informations	
Packing Dimension	190 x 70 x 35mm
Packing Weight	0.121kg
Carton Dimension	405 x 370 x 360mm
Carton Q'ty	100pcs
Carton Weight	13kg













