

LogiLink®

Notebook Power Adapter 65W


Art. No.: PA0171



Ideal as a replacement or secondary power adapter for various notebooks at home and in the office.

Features:

- » 65W Universal Notebook Power Adapter with 9 changeable tips
- » Charge most brands of laptops in market with multiple easy-to-install tips
- » Reliable replacement or secondary power adapter in home or office
- » Full safety design: Built-in protection against over current, over voltage, over temperature and short-circuit protection

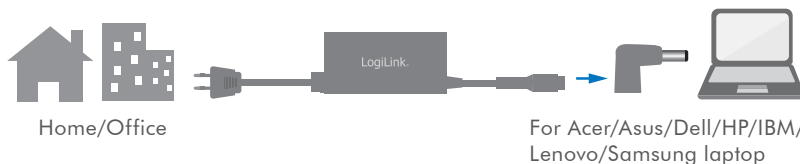

Power Tips Compatible Table:

K2	7.4 x 5.0 mm	HP 18.5V 3.5A, 19.5V 3.33A
K4	5.5 x 3.0 mm	Samsung 19V 2.1A/3.16A
K5	5.5 x 2.5 mm	Asus/Toshiba/Lenovo 19V 1.58A/2.37A/3.42A, 20V 2A/3.25A
K6	5.5 x 1.7 mm	Acer 19V 1.58A/2.1A/3.42A
K10	4.5 x 3.0 mm	HP 19.5V 3.33A
K15	7.4 x 5.0 mm	Dell 19.5V 3.34A
K16	Square size	Lenovo/IBM 20V 2.25A/3.25A
K17	4.8 x 1.7 mm	HP 18.5V 3.5A, 19.5V 3.33A
K18	4.0 x 1.2 mm	Asus 19V 1.75A/2.37A/3.42A



PA0171



4 052792 048223

Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademark of their respective owners.

Best Connectivity

LogiLink®



Notebook Power Adapter 65W

Art. No.: PA0171



Specification:

Input Voltage	AC 100-240V 50/60Hz 1.5A max
Output Power	18.5-20V 2.1-3.5A 65W max
Efficiency	Level V
Dimension	92 x 46 x 23mm (not including cable)
Weight	224g
Cable Length	1.8m
AC Cable Length	1.2m



Package Contents:

- » 1 x Power Adapter for Notebook
- » 9 x Changeable Tips
- » 1 x AC Power Cord
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 201 x 127.5 x 42mm
- » Packing Weight: 0.41kg
- » Carton Dimension: 450 x 268 x 205mm
- » Carton Q'ty: 20pcs
- » Carton Weight: 9.1kg

Warning

- *For use with Information Technology Equipment.
- *Compare the specifications of your device with the specifications of the adapter. The power current (A) of your device should be equal to or lower than the power current of the power supply.
- *Only to be used indoor.
- *Only to be used after powering on.
- *Only to be used within max load.
- *Remove the power adapter from its power source after use.



PA0171



4 052792 048223

Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.

Best Connectivity