



| Item No. | Color | Length | EAN Code |
|----------|-------|-----------|---------------|
| CU0041 | Black | 1000±30mm | 4052792001044 |
| CU0042 | Black | 2000±30mm | 4052792001051 |
| CU0043 | Black | 3000±30mm | 4052792001068 |



PACKING:1PCS/PE BAG+LABEL


NOTE:

- CABLE:UL2725,AL+B-FOIL,(30AWG*1P)+[AL+MY-FOIL,(30AWG*1P+D)]*2+24AWG*2C.
BLACK COLOR,OD=5.5±0.2mm,PVC JACKET.
- LENGTH:L.
- CONNECTORS:USB3.0 M(A)*1PCS,USB3.0 F(A)*1PCS(BLUE INSULATOR)(NICKEL)(PIN GOLD PLATED 15U”).
- MOLD:MOLDING USB TYPE.
- CONTACTS:

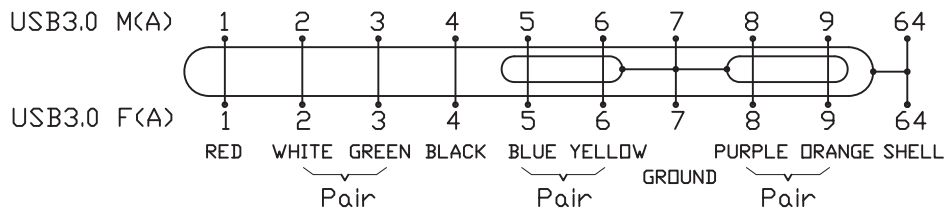

- OPEN/SHORT TEST: 100% TEST.
A.100% OPEN,SHORT&INTERMITANCE TEST.
B.CONDUCTOR RESISTANCE:3ohms MAX;
C.INSULATION RESISTANCE:5M Min/,10ms;
- ALL MUST BE RoHS COMPLIANT.

Sticker ex:

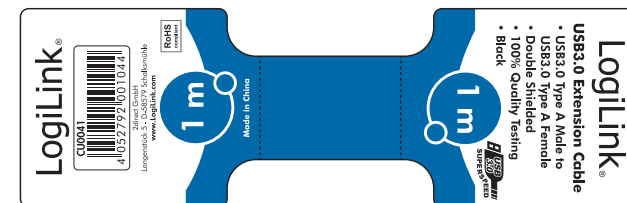

Pantone Pantone 2945C, Black
Size: 48x150 mm R= 2mm

| COMPANY | | | ITEM NO. | CU0041 to CU0043 | NO | B6128 | Part Name | USB3.0AM-AF | | |
|----------|------------|-------------|-------------|------------------|------|-------|--------------|-------------|----------|-----|
| REVISION | DATE | DISCRIPTION | DRAWN BY | | SPEC | | 2direct GmbH | | SCALE | |
| REV.A/0 | 2011.12.25 | T10-1112008 | DESIGNED BY | | | | | | UNIT(mm) | |
| | | | APPROVAL BY | | | | | | PAGE | 1/1 |