



Network Installation Cable Cat.6A S/FTP, White

Technical Features

Performance: Cat.6A up to 90 m, channel link tested

Standards: ISO/IEC 11801, EN 50173-4, IEC 61156-6, EN 50575

Application: Ethernet up to 10GBase-T, ISDN, PoE, PoE+ (IEEE 802.3at)


Conductor: Bare copper wire Ø 0.4 mm AWG26

Shielding: 4 individually screened pairs (PIMF), copper braid (tinned)

Sheath: LSZH, white, Ø 6 mm outer cable diameter

Fire Protection Class: Eca (EN50575:2014/A1:2016)

Length	Part no.	EAN Code
50 m	CPV0050	4052792047738
100 m	CPV0051	4052792047745
305 m	CPV0052	4052792047752

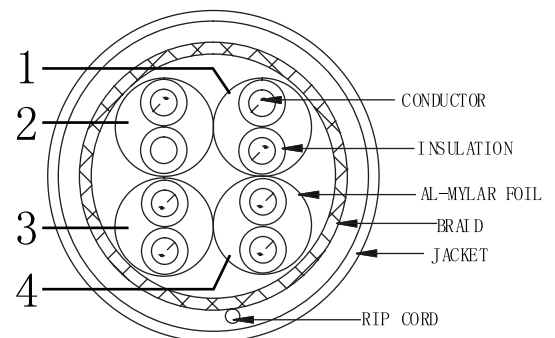

1. BLUE/WHITE 2. ORANGE/WHITE
3. BROWN/WHITE 4. GREEN/WHITE



www.logilink.de



RoHS
compliant



Made in China

* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.

Package Contents

CAT6A Installation Cable x 1

Packaging Informations

Packing Dimension	mm
-------------------	----

Packing Weight	kg
----------------	----

Carton Dimension	mm
------------------	----

Carton Q'ty	pcs
-------------	-----

Carton Weight	kg
---------------	----

