

LogiLink®



5-Port Gigabit Ethernet Desktop Switch

Art. No.: NS0105

NS0105 Gigabit Ethernet Switch, mini and exquisite, is specially designed for SOHO and small enterprise users. With easy installation, stable performance and high forwarding rate, it supports Auto MDI/MDIX and auto negotiates the port connection mode. In addition, learning/aging MAC address automatically and 2K MAC address table are also provided.

Features:

- » Five 10/100/1000Base-T Gigabit Ethernet Ports
- » Supports Store-Forward Switching method
- » Supports Full/Half duplex modes and Auto-Negotiation
- » Supports Auto-MDI/MDI-X each port



Specification:

Solution	RTL8367N-CG
Protocols/Standards	IEEE 802.3, IEEE 802.3u and IEEE 802.3ab
Interface	5 x 10/100/1000Mbps RJ45 ports
MAC Address Table	2K
Buffer Memory	128K bytes
Jumbo Frame	9K bytes
Switching Fabric	10Gbps
Packet Forwarding Rate (in 64 bytes)	10M: 14880 pps 100M: 148800 pps 1000M: 1488000 pps
LED Indicator	1 x Power LED (Power: Green) 5 x Port LEDs (Link/Activity) Off: Port disconnected or link fail Green on: 1000Mbps connected Blinking: sending or receiving data
Power	External Power supply 5V/1A (5W)



NS0105



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademark of their respective owners.


LogiLink®



5-Port Gigabit Ethernet Desktop Switch

Art. No.: NS0105

Power Consumption	Max. DC Input 2.129W
Product Dimension	99 x 67.6 x 24.5mm
Case Material	Plastic
Operating Temperature	0°C ~ 40°C
Storage Temperature	-20°C ~ 70°C
Operating Humidity	10% ~ 90% RH, non-condensing
Storage Humidity	5% ~ 90% RH, non-condensing

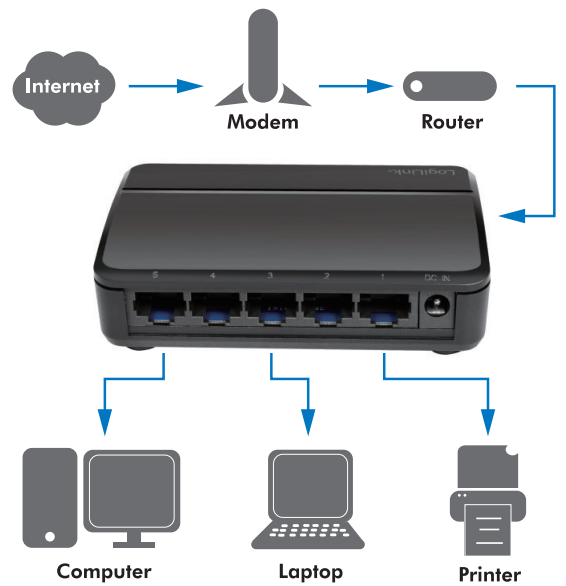

Package Contents:

- » 1 x 5-Port Gigabit Ethernet Desktop Switch
- » 1 x External Supply 5V/1A (5W)
- » 1 x User Manual

Package Information:

- » Packing Dimension: 180 x 140 x 35mm
- » Packing Weight: 0.2kg
- » Carton Dimension: 382 x 296 x 386mm
- » Carton Q'ty: 40pcs
- » Carton Weight: 9.61kg



NS0105



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademark of their respective owners.

Best Connectivity